

ISESAR

IP INTERCOM SYSTEM

CATALOG 2023



1 Company profile

2 Products

3 Service

4 Contact us

CONTENTS



01 PART

Company profile

ISESAR TECHNOLOGY

All - digital smart community solution

Profile

Founded in 2016, it is a company of state-owned background. we are rooted in intercom and smart home solution industry with our strengths on communications and connections, creating completed smart intercom & home control solutions for properties and spaces with a one- stop smart devices, mobile apps and cloud platform.

At present, ISESAR has served more than 300 large property development companies domestic and oversea market. Our self-developed products and solutions are widely installed in various types of residential and commercial projects, more than 3.5million units and households have been benefited by ISESAR smart solutions.

ISESAR invests about 13% of revenue in research and development annually. We have the powerful R&D and manufacturing resources, enable us to meet the requirements and challenges of market with consistently excellent design and excellent quality in the past 7 years.



02 PART

Products

INTERCOM SYSTEM

Android system & IP system & Analog system

ANDROID SYSTEM

Video door phone

① MULTI APARTMENT

② VILLA SYSTEM

- Tuya Application Compatible
- Full Touch Screen Model
- POE Switch Connection
- Cusemize UI & Language
- Calling Without Indoor Monitor

4.3inch



black

silvery

golden

ISZJ4A



ISZJ4B



ISZJ4C


10.1inch



ISZJ10D
Black & Gold



ISZJ10A



ISZJ10B



ISZJ10C

8inch



ISZJ8A
Black & Gold



ISCPRL8C

4.3inch



ISBS4A
Black & Gold

Android System

Video door phone for mult apartments



Description

- Full touch 8 inch screen
- Calling ,intercom, unlocking, monitoring
- Apartment name and number local setting
- Support connect up to 200 apartments
- 2 HD cameras, live face recognition
- Night vision with led light
- Full Digital TCP/IP intercom
- Android System, ARM CPU
- Customized UI & Language
- Wall/Flush Install
- Support to connect without indoor monitornits)
- RFID Card/Password/Face recognition/Mobile phone remote unlock



ISZJ8A

888QFJ7F

Specification

ISZJ8A	
Material	Aluminum
Color	Silver/Champagne
Camera	200W(1080P)
Screen Display	8 inch screen, 800*1280 px
View Angle	120°
Power supply	DC12V
Working Temp.	-20°C~70°C
Card Type	IC Card, M1, S50, 13.56MHZ
Protection grade	IP33
Face recognition	Recognition rate 0.5 seconds;
Dimension	331*152*10mm

888QFJ7F	
Color	Silver/Gold
Screen Display	7 inch screen
Resolution	800*480px
Screen Type	Full touch
Communication	RJ45-TCP/IP
Power	POE Switch (24V)
System	Linux system
Elevator	Elevator control device
Zone	Eight defense zones
Working Temp.	-20°C~70°C
Dimension	215*136*17mm

Installation



(Up to 200 apartments)

Android System

Waterproof IP54 video door phone



Description

- Full touch 8 inch screen
- Calling ,intercom, unlocking, monitoring
- Apartment name and number local setting
- Support connect up to 200 apartments
- 2 HD cameras, live face recognition
- Night vision with led light
- Full Digital TCP/IP intercom
- Android System, ARM CPU
- Customized UI & Language
- Wall/Flush Install & waterproof IP56
- Support to connect without indoor monitornits)
- RFID Card/Password/Face recognition/Mobile phone remote unlock



ISCPRL8C




888QFJ7G

Specification

ISCPRL8C	
Material	Aluminum
Color	Silver/Champagne
Camera	200W(1080P)
Screen Display	8 inch screen, 800*1280 px
View Angle	120°
Power supply	DC12V
Working Temp.	-20°C~70°C
Card Type	IC Card, M1, S50, 13.56MHZ
Protection grade	IP56
Face recognition	Recognition rate 0.5 seconds;
Dimension	331*152*10mm

888QFJ7G	
Color	Silver/Gold/Gray/Black
Screen Display	7 inch screen
Resolution	800*480px
Screen Type	Touch screen / Touch button optional
Communication	RJ45-TCP/IP
Power	POE Switch (24V)
System	Linux system
Elevator	Elevator control device
Zone	Eight defense zones
Working Temp.	-20°C~70°C
Dimension	200*140*16mm

Installation

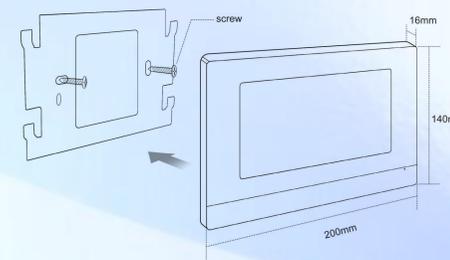

(Up to 200 apartments)

Android System

Video door phone for villa system



Indoor unit and tuya app
All of them can get the video calling



Description

- Full touch 4.3 inch screen
- Calling ,intercom, unlocking, monitoring
- 2 HD cameras, live face recognition
- Night vision with led light
- Full Digital TCP/IP intercom
- Can call indoors or call the app of phone at the same time
- Android System, ARM CPU
- Customized Language
- Wall/Flush Install
- Support to connect up to 6pcs indoor monitorsits
- RFID Card/Password/Face recognition/Mobile phone remote unlock



ISBS4A





888QFJ7F

Specification

ISBS4A	
Material	Aluminum
Color	Silver/Gold
Camera	200W(1080P)
Screen Display	4.3 inch screen, 800*1280 px
Power supply	DC12V
Working Temp.	-20°C~70°C
Card Type	IC Card, M1, S50, 13.56MHZ
Memory	LPDDR3 1GB
Protection grade	IP33
Face recognition	Recognition rate 0.5 seconds;
Dimension	210*40*120mm

888QFJ7F	
Color	Silver/Gold
Screen Display	7 inch screen
Resolution	800*4801px
Screen Type	Full touch
Communication	RJ45-TCP/IP
Power	POE Switch (24V)
System	Linux system
Elevator	Elevator control device
Zone	Eight defense zones
Working Temp.	-20°C~70°C
Dimension	215*136*17mm

Installation

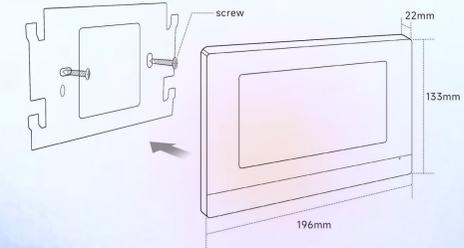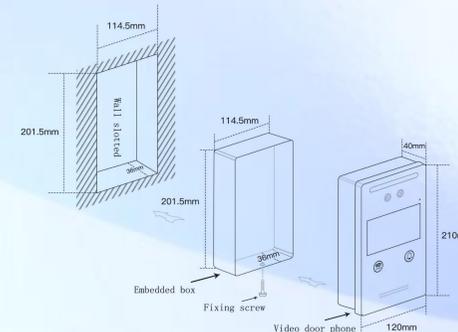

(Up to 6 indoor monitors)

IP SYSTEM

Video door phone

① MULTI APARTMENT

② VILLA SYSTEM

- Calling, Unlocking, Intercom & Monitor
- Sensor & Physical Button Model
- POE Switch Connection
- Customize UI & Language
- With Face recognition

4.3inch



888QZJ4A



888QZJ4B



888QZJ4C


One Key



888QBSA

IP System

Video door phone for multi apartments

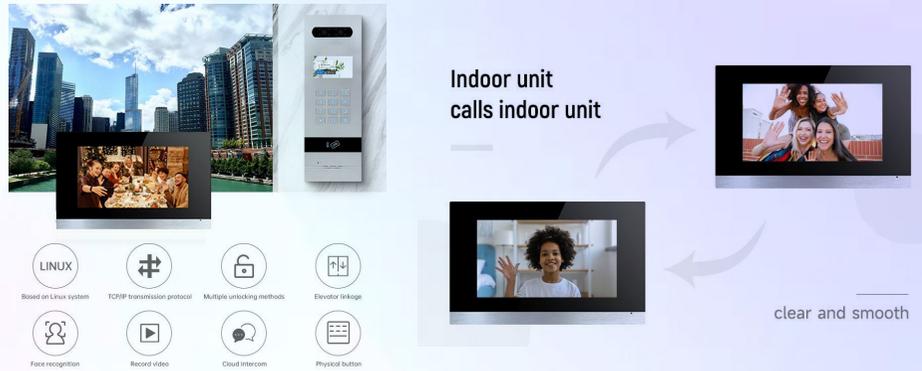

Description

- Physical buttons 4.3 inch screen
- Calling ,intercom, unlocking, monitoring
- Support connect up to 9999 apartments
- HD cameras, face recognition
- Night vision with led light
- Full Digital TCP/IP intercom
- Linux System, ARM CPU
- Customized language & function
- Wall/Flush Install
- RFID Card/Password/Face recognition unlock



888QZJ4A





888QFJ7F

Specification

888QZJ4A	
Material	Aluminum
Color	Silver/Gold
Solution	720P
Screen Display	4.3 inch screen
View Angle	120°
Power supply	DC12V
Working Temp.	-20°C~70°C
Card Type	IC Card, M1, S50, 13.56MHZ
Protection grade	IP33
Face recognition	Recognition rate 0.5 seconds;
Dimension	400*140*51mm

888QFJ7F	
Color	Silver/Gold
Screen Display	7 inch screen
Resolution	800*4801px
Screen Type	Full touch
Communication	RJ45-TCP/IP
Power	POE Switch (24V)
System	Linux system
Elevator	Elevator control device
Zone	Eight defense zones
Working Temp.	-20°C~70°C
Dimension	215*136*17mm

Installation

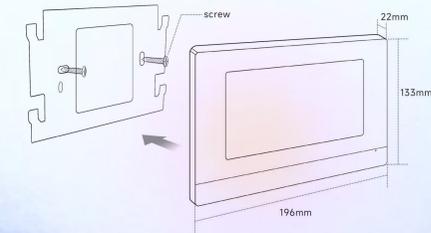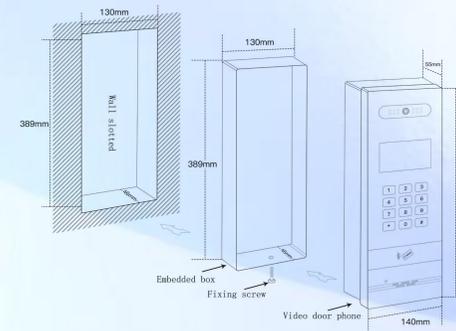

(Up to 9999 apartments)

IP System

Video door phone for villa system



Description

- Calling ,intercom, unlocking, monitoring
- Digital camera with stable and clear image
- HD cameras with night vision
- Full Digital TCP/IP intercom
- Linux System, ARM CPU
- Customized Language
- Wall/Flush Install
- Support to connect up to 6pcs indoor monitorsits
- RFID Card/Password/ indoor monitor unlock



888QBSA




888QF7F

Specification

888QBSA	
Material	Aluminum
Color	Silver
Solution	720P
System	Linux system
Power supply	DC12V
Working Temp.	-20°C~70°C
Card Type	IC Card, M1, S50, 13.56MHZ
Protection grade	IP33
Unlock	Password, RFID card & Indoor monitor
Dimension	154*85*15.5mm
Installation	143*78.5*35mm

888QF7F	
Color	Silver/Gold
Screen Display	7 inch screen
Resolution	800*4801px
Screen Type	Full touch
Communication	RJ45-TCP/IP
Power	POE Switch (24V)
System	Linux system
Elevator	Elevator control device
Zone	Eight defense zones
Working Temp.	-20°C~70°C
Dimension	215*136*17mm

Installation

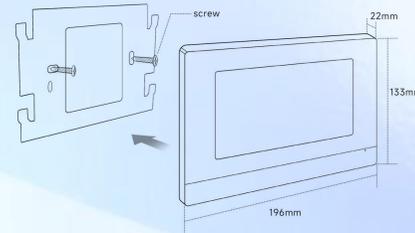

(Up to 6 indoor monitors)

ANALOG SYSTEM

4 Wire video door phone

① MULTI APARTMENT

② 4 APATEMTNS

③ VILLA SYSTEM

- Calling、Unlocking、Intercom & Monitor
- Calling Each Apartments Directly
- Connection Without Middleware
- Indoor Monitor Supports SD Card

1-28 ROOM



YD-591DC4 (1-25 Apartments)

4 ROOM



4ISZJC



4ISZJD

One Key



4ISZJA



4ISZJB



YD270C4



YD930C4

Analog System

4 wire door phone for multi apartments



Description

- Calling ,intercom, unlocking, monitoring
- Digital camera with stable and clear image
- Support to connect up to 28pcs indoor monitorsits
- High quality aluminum alloy/stainless panel
- Easy direct-press buttons operation
- Nameplates and buttons with blue backlight
- Waterproof, vandal proof and durable



YD-591DC4





YD-560C4

Specification

YD-591DC4	
Material	Aluminum alloy/ Stainless steel
Color	Silver
Camera	700TVL
View Angle	90°/ 170°
Power supply	DC 12V/15V/32V
Working current	165mA
Working Temp.	25°C ~ 65°C
Protection grade	IP55
Illumination	0.1Lux
Night light	8 x LEDs for 90°, 5 x LEDs for 170°
Installation	360*130*55mm

YD-560C4	
Color	Black/White
Screen Display	7 inch screen
Material	Acrylic/ABS plastic
Screen Type	TFT-LCD
Resolution	800x480
System	4 Wire
Working voltage	DC 12V/15V/18V
Working current	420mA
Working Temp.	-10°C~50°C
Installation	Surface mounted
Dimension	241*161*25mm

Installation

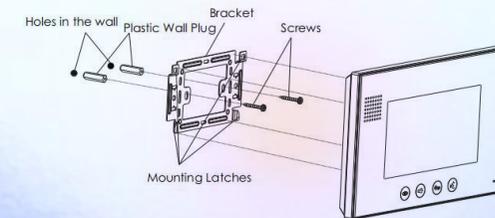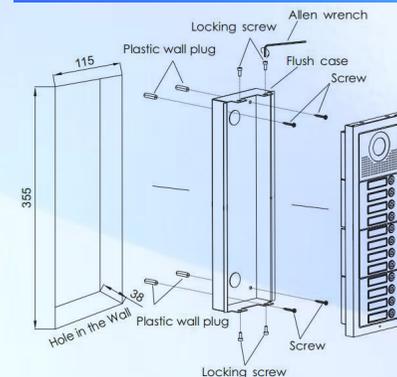

(Up to 28 indoor monitors)

Analog System

4 wire door phone for villa system



Description

- Calling ,intercom, unlocking, monitoring
- Digital camera with stable and clear image
- With photo and video recording functions
- One button calling/talking
- Supports connecting 2 doorbells & 6 indoor monitors & 2 cameras
- Maximum support 32G memory card
- Suitable for families, villas, apartments, offices, hospitals and other places



4ISZJA



4ISA7H

Specification


4ISZJA

Material	ABS
Color	Silver
Camera	1 Megapixel
View Angle	130°
Power supply	DC 12V
Input voltage	AC 100-240V
Power consumption	Standby ≤1W Working ≤5W
Working Temp.	20°C ~ 70°C
Working humidity	10% ~ 70%
Night light	6 LED infrared fill lights
Dimension	127.5*56*21mm

4ISA7H


Color	Black
Screen Display	7 inch screen
Material	Plastic case
Screen Type	TP touch screen
Resolution	800x480
System	4 Wire
Working voltage	DC 15V
Working Temp.	20°C ~ 70°C
Working humidity	10% ~ 70%
Installation	Wall hanging
Dimension	189*122*23mm

Installation

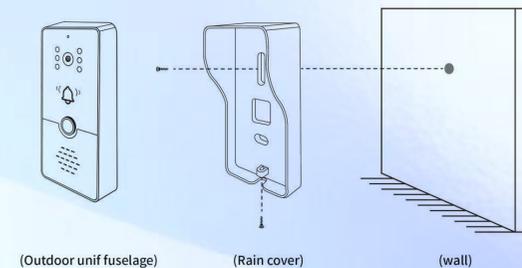

Analog System

4 wire door phone for villa system

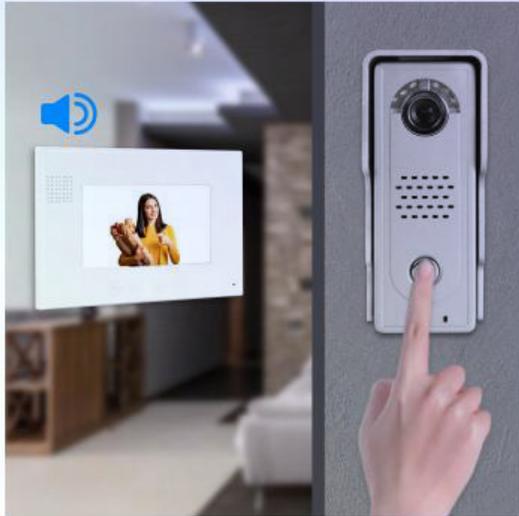

Description

- Calling ,intercom, unlocking, monitoring
- Digital camera with stable and clear images
- High-quality zinc alloy housing Simple but fashion design
- With rain cover, angle bracket for option
- One button calling/talking
- Waterproof, dustproof, anti-vandal design



YD-930C4





YD-660C4S

Specification

YD-930C4	
Material	Zinc alloy
Color	Silver/Black
Camera	700TVL
View Angle	90°
Power supply	DC 12V/15V
Working current	100mA
Working Temp.	25°C ~ 65°C
Protection grade	IP55
Illumination	0.1Lux
Night light	6 x LEDs
Dimension	134*58*40mm

YD-660C4S	
Color	Black/White
Screen Display	7 inch screen
Material	Acrylic/ABS plastic
Screen Type	TFT-LCD
Resolution	800x480
System	4 Wire
Working voltage	DC 12V/32V
Working current	420mA
Working Temp.	-10°C~50°C
Installation	Surface mounted
Dimension	212*144*16mm

Installation

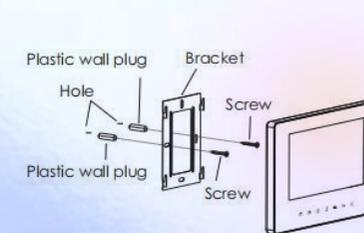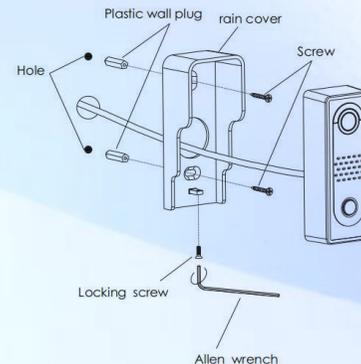

Analog System

4 wire door phone for villa system




Description

- Calling ,intercom, unlocking, monitoring
- Digital camera with stable and clear imageits
- Adjustable camera
- Nameplate with blue backlight 700TV lines
- HD color camera One button operation
- Waterproof, dustproof, anti-vandal design



YD-270C4




YD-660C4S

Specification

YD-270C4		YD-660C4S	
Material	Aluminum alloy	Color	Black/White
Color	Silver/Black	Screen Display	7 inch screen
Camera	700TVL	Material	Acrylic/ABS plastic
View Angle	90°	Screen Type	TFT-LCD
Power supply	DC 12V/15V/18V	Resolution	800x480
Working current	135mA	System	4 Wire
Working Temp.	25°C ~ 65°C	Working voltage	DC 12V/32V
Protection grade	IP55	Working current	420mA
Illumination	0.1Lux	Working Temp.	-10°C~50°C
Night light	4 x LEDs	Installation	Surface mounted
Dimension	91*130*42mm	Dimension	212*144*16mm

Installation

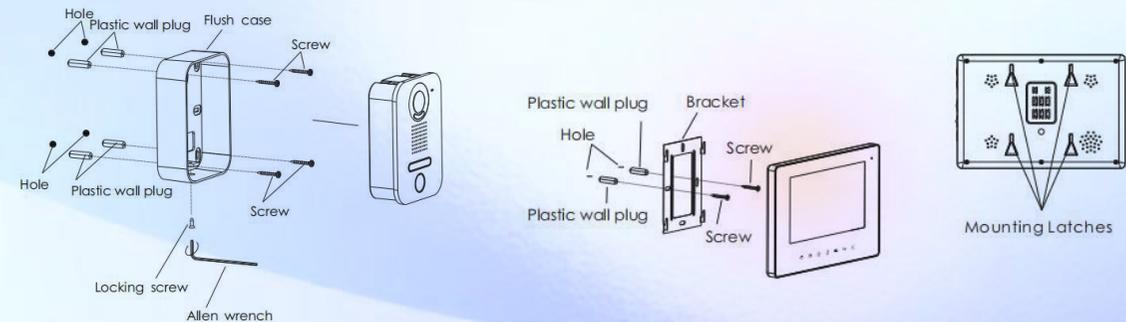

ANALOG SYSTEM

Network cable video door phone

① AUDIO SYSTEM

② NUMBER DISPLAY

③ SCREEN DISPLAY

- Calling, Unlocking, Intercom & Monitor
- Sensor & Physical Button Model
- Switch Connection
- Intelligent Automatic Writing Room Number

Audio



888ZJD

Number



888ZJA



888ZJM



888ZJH



888ZJC

Screen




888ZJE



888ZJB

Analog System

digital video door phone for multi apartments

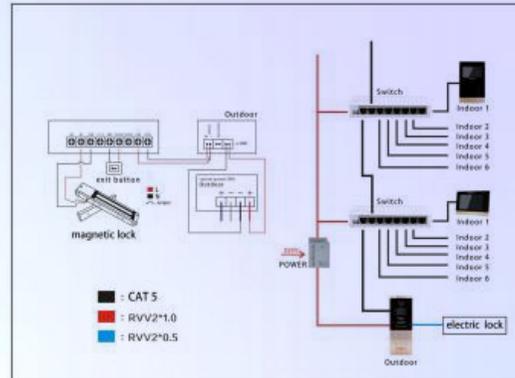

888ZJM



888FJ4B

Specification

888ZJM	
Material	Aluminum alloy
Color	Gold
Camera	720P
Display	Room number
Power supply	DC 12V
Working Temp.	-20°C~70°C
Protection grade	IP33
Install method	Wall/flush install
Dimension	343*128*40mm
Installation	360*140*50mm

888FJ4B	
Color	Color
Screen Display	Screen Display
System	System
Screen Type	Screen Type
Connection	Connection
Power	Power
Working Temp.	Working Temp.
Customization	Customization
Install method	Install method
Dimension	Dimension

Description

- Calling ,intercom, unlocking, monitoring
- Digital camera with stable and clear image
- Support to connect up to 9999pcs indoor monitorsits
- High quality aluminum panel
- Intelligent automatic writing room number
- Switch connection

Installation

(Up to 9999 indoor monitors)

ANALOG SYSTEM

2 Wire audio door phone

① AUDIO SYSTEM

② INDOOR UNITS

- Calling, Unlocking And Intercom
- Physical Button Model
- 2 Wire Connection
- Intelligent Automatic Writing Room Number
- Affordable Price, Simple Wiring

DUDIO



YD-138


INDOOR



138DF3

Analog System

2 wire audio door phone for multi apartments

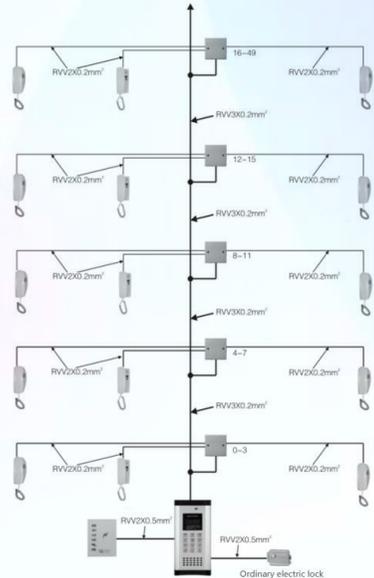

Description

- Calling ,intercom, unlocking
- Support to connect up to 9999pcs indoor unitsts
- High quality aluminum panel
- Intelligent automatic writing room number
- Hand-free indoor units optional



Specification

YD-138		YD-138DF3	
Material	Aluminum alloy	Color	White
Color	Silver	Type	Physical buttons
Keypad	Physical buttons	Material	Plastic panel
Display	Room number	Connection	2 Wire
Power supply	DC 12V	Function	Intercom,unlock
Working Temp.	-20°C~70°C	System	Analog system
Protection grade	IP33	Calling Time	80S
Install method	Wall/flush install	Customization	Printing LOGO
Dimension	300*110*30mm	Install method	Wall/magnetic hanging Install
Installation	360*140*50mm	Dimension	190*79*44mm

Indoor monitor



888FJ4B

1. 4.3 inch screen with touch buttons
2. Calling, intercom, unlocking, monitoring
3. Night vision, LINUX System
4. Ethernet RJ45 connector
5. Call the elevator
6. Eight defense zones
7. Support POE 24V non-standard POE switch
8. Dimension:198*125*15(mm)
9. Install Method : Wall/magnetic hanging Install



888QFJ7L-1

1. 7 inch **touch screen**
2. Calling, intercom, unlocking, monitoring
3. Night vision, LINUX System
4. Ethernet RJ45 connector
5. Call the elevator
6. Eight defense zones
7. Support POE 24V non-standard POE switch
8. Dimension:220*142*20(mm)
9. Install Method : Wall/magnetic hanging Install



888QFJ7H

1. 7 inch touch screen
2. Calling, intercom, unlocking, monitoring
3. Night vision, LINUX System
4. Ethernet RJ45 connector
5. Call the elevator
6. Eight defense zones
7. Support POE 24V non-standard POE switch
8. Dimension:188.1*121*21.6(mm)
9. Install Method : Wall/magnetic hanging Install




88QFJ4C

1. 4.3 inch screen with physical buttons
2. Calling, intercom, unlocking, monitoring
3. Night vision, LINUX System
4. Ethernet RJ45 connector
5. Call the elevator
6. Eight defense zones
7. Support POE 24V non-standard POE switch
8. Dimension:180*110*20(mm)
9. Install Method : Wall/magnetic hanging Install



888QFJ7L-2

1. 7 inch screen with **physical buttons**
2. Calling, intercom, unlocking, monitoring
3. Night vision, LINUX System
4. Ethernet RJ45 connector
5. Call the elevator
6. Eight defense zones
7. Support POE 24V non-standard POE switch
8. Dimension:220*142*20(mm)
9. Install Method : Wall/magnetic hanging Install



888QFJ10A

1. 10 inch touch screen
2. Calling, intercom, unlocking, monitoring
3. Night vision, LINUX System
4. Ethernet RJ45 connector
5. Call the elevator
6. Eight defense zones
7. Support POE 24V non-standard POE switch
8. Dimension:285*180*20(mm)
9. Install Method : Wall/magnetic hanging Install



888QFJ7A-1

1. 7 inch **touch screen**
2. Calling, intercom, unlocking, monitoring
3. Night vision, LINUX System
4. Ethernet RJ45 connector
5. Call the elevator
6. Eight defense zones
7. Support POE 24V non-standard POE switch
8. Dimension:215*136*16(mm)
9. Install Method : Wall/magnetic hanging Install



888QFJ7F

1. 7 inch touch screen
2. Calling, intercom, unlocking, monitoring
3. Night vision, LINUX System
4. Ethernet RJ45 connector
5. Call the elevator
6. Eight defense zones
7. Support POE 24V non-standard POE switch
8. Dimension:215*136*17(mm)
9. Install Method : Wall/magnetic hanging Install




888FJD

1. Physical buttons
2. Materials: Plastic panel
3. Intercom, unlock
4. Calling Time: 80S
5. Dimension:110*85*23(mm)



888QFJ7A-2

1. 7 inch screen with **physical buttons**
2. Calling, intercom, unlocking, monitoring
3. Night vision, LINUX System
4. Ethernet RJ45 connector
5. Call the elevator
6. Eight defense zones
7. Support POE 24V non-standard POE switch
8. Dimension:215*136*16(mm)
9. Install Method : Wall/magnetic hanging Install



888QFJ7G-1

1. 7 inch **touch screen**
2. Calling, intercom, unlocking, monitoring
3. Night vision, LINUX System
4. Ethernet RJ45 connector
5. Call the elevator
6. Eight defense zones
7. Support POE 24V non-standard POE switch
8. Dimension:200*140*16(mm)
9. Install Method : Wall/magnetic hanging Install




138DF3

1. Physical buttons
2. Materials: Plastic panel
3. Intercom, unlock
4. Calling Time: 80S



888QFJ7B

1. 7 inch touch screen
2. Calling, intercom, unlocking, monitoring
3. Night vision, LINUX System
4. Ethernet RJ45 connector
5. Call the elevator
6. Eight defense zones
7. Support POE 24V non-standard POE switch
8. Dimension:215*136*17(mm)
9. Install Method : Wall/magnetic hanging Install



888QFJ7G-2

1. 7 inch screen with **touch buttons**
2. Calling, intercom, unlocking, monitoring
3. Night vision, LINUX System
4. Ethernet RJ45 connector
5. Call the elevator
6. Eight defense zones
7. Support POE 24V non-standard POE switch
8. Dimension:200*140*16(mm)
9. Install Method : Wall/magnetic hanging Install

1-12 Table :Linux System
Use with Android & IP system outdoor station


13-14 Table:Audio system
Use with 2 wire system outdoor station

Indoor monitor



888FJ4B

1. 4.3 inch screen with physical buttons
2. Calling, intercom, unlocking, monitoring
3. High temperature resistant oil injection panel
4. POE switch power supply
5. High quality screen & high-end glass lens
6. Digital camera, stable and clear image shooting
7. Dimension:198*125*15(mm)
8. Install Method : Wall/magnetic hanging Install



888QJ7L

1. 7 inch screen with physical buttons
2. Calling, intercom, unlocking, monitoring
3. High temperature resistant oil injection panel
4. Golden and white color optional
5. POE switch power supply
6. Digital camera, stable and clear image shooting
7. Dimension:220*142*20(mm)
8. Install Method : Wall/magnetic hanging Install



4XFJ7G

1. 7 inch TFT LCD panel display with physical buttons
2. No radiation and low power consumption
3. True high-definition widescreen display
4. Indoor mutual intercom function.
5. Avoiding disturb during the rest time
6. Image brightness, contrast, and ring volume adjustable
7. Ultra-thin design,stylish style and high quality
8. The available distance is 100M



888FJ4C

1. 4.3 inch screen with physical buttons
2. Calling, intercom, unlocking, monitoring
3. High temperature resistant oil injection panel
4. POE switch power supply
5. High quality screen & physical buttons
6. Digital camera, stable and clear image shooting
7. Dimension:180*110*20(mm)
8. Install Method : Wall/magnetic hanging Install



4XFJ4B

1. 4.3 inch TFT LCD panel display with physical buttons
2. No radiation and low power consumption
3. True high-definition widescreen display
4. Indoor mutual intercom function.
5. Avoiding disturb during the rest time
6. Image brightness, contrast, and ring volume adjustable
7. Ultra-thin design,stylish style and high quality
8. The available distance is 100M



4XFJ7K

1. 7 inch TFT LCD panel display with physical buttons
2. No radiation and low power consumption
3. True high-definition widescreen display
4. Indoor mutual intercom function.
5. Avoiding disturb during the rest time
6. Image brightness, contrast, and ring volume adjustable
7. Ultra-thin design,stylish style and high quality
8. The available distance is 100M



888FJ65A

1. 6.5 inch screen with physical buttons
2. Calling, intercom, unlocking, monitoring
3. High temperature resistant oil injection panel
4. POE switch power supply
5. High quality screen & high-end glass lens
6. Digital camera, stable and clear image shooting
7. Dimension:196*133*22(mm)
8. Install Method : Wall/magnetic hanging Install



4XFJ4C

1. 4.3 inch TFT LCD panel display with physical buttons
2. No radiation and low power consumption
3. True high-definition widescreen display
4. Indoor mutual intercom function.
5. Avoiding disturb during the rest time
6. Image brightness, contrast, and ring volume adjustable
7. Ultra-thin design,stylish style and high quality
8. The available distance is 100M



4XFJ7H

1. 7" high resolution color TFT LCD touch screen
2. No radiation and low power consumption
3. True high-definition widescreen display
4. Indoor mutual intercom function.
5. Avoiding disturb during the rest time.
6. Image brightness, contrast, and ring volume adjustable
7. Ultra-thin design,stylish style and high quality.
8. The available distance is 100M.
9. [Taking photos and recording videos in real time](#)



888FJ7A

1. 7 inch screen with physical buttons
2. Calling, intercom, unlocking, monitoring
3. High temperature resistant oil injection panel
4. Golden and white color optional
5. POE switch power supply
6. Digital camera, stable and clear image shooting
7. Dimension:215*136*16(mm)
8. Install Method : Wall/magnetic hanging Install



4XFJ7B

1. 4.3 inch TFT LCD panel display with touch buttons
2. No radiation and low power consumption
3. True high-definition widescreen display
4. Indoor mutual intercom function.
5. Avoiding disturb during the rest time
6. Image brightness, contrast, and ring volume adjustable
7. Ultra-thin design,stylish style and high quality
8. The available distance is 100M



4XFJ7I

1. 7" high resolution color TFT LCD screen with physical button
2. No radiation and low power consumption
3. True high-definition widescreen display
4. Indoor mutual intercom function.
5. Avoiding disturb during the rest time.
6. Image brightness, contrast, and ring volume adjustable
7. Ultra-thin design,stylish style and high quality.
8. The available distance is 100M.
9. [Taking photos and recording videos in real time](#)



888FJ7B

1. 7 inch screen with touch buttons
2. Calling, intercom, unlocking, monitoring
3. High temperature resistant oil injection panel
4. POE switch power supply
5. High quality screen
6. Digital camera, stable and clear image shooting
7. Dimension:215*136*17(mm)
8. Install Method : Wall/magnetic hanging Install



4XFJ7L

1. 4.3 inch TFT LCD panel display
2. No radiation and low power consumption
3. True high-definition widescreen display
4. Indoor mutual intercom function.
5. Avoiding disturb during the rest time
6. Image brightness, contrast, and ring volume adjustable
7. Ultra-thin design,stylish style and high quality
8. The available distance is 100M

1-14 Table :Analog System

1-7 Table :Use with Network cable outdoor station

8-14 Table :Use with 4 wire system outdoor station

Accessories



POE4

1. 220V access
2. Support DIP VLAN
3. 1-4 ports support POE
4. Uplink port 2 100M electrical ports
5. Built-in power supply 52V1.25A/24V3A
6. Ethernet port transmission supports 250 meters




100QFS

1. Desktop
2. External power supply DC5V1A
3. Wavelength A-end 1310nm, B-end 1550nm,
4. Fiber Interface SC
5. Transmission distance 20KM



YD-12V3A

1. Powering the audio door phone
2. Dimension: 218*161*73 mm
3. For 2-wire system



YD-T1

1. Metal shell
2. Power off unlock



POE8

1. 220V access
2. Support DIP VLAN
3. 1-8 ports support POE
4. Uplink port 2 100M electrical ports
5. Built-in power supply 52V1.25A/24V3A
6. Ethernet port transmission supports 250 meters



SA-H1D

1. Metal shell, waterproof
2. No key, with the card management
3. Large capacity: 15,000 users
4. External card reader



YD-138Z

1. Signal isolation protection
2. Four indoor units configure one decoder
3. For 2-wire system



YD-EB1

1. Metal Exit Button




POE16

1. Ports 1-16 support POE
2. Desktop built-in power supply;
3. Backplane bandwidth 2.0Gbps,
4. Single port power supply 15.4W,
5. The total power of the whole machine is 150W,
6. The uplink port is two 100M electrical ports.



SA-M2

1. Metal shell, waterproof
2. Touch the button
3. 1000\4000 users
4. Anti-flapping door
5. External card reader




YD-D1

1. Metal shell
2. Power on and unlock



YD-EB2

1. Metal Exit Button



POE24

1. PoE power output: DC 24V (15V/18V/24V optional)
2. PoE single port power ≤15W
3. (Default 4,5(+)/7,8(-) power supply, 1,2(+)/3,6(-) power supply optional)
4. PoE total power ≤250W
5. Downstream ports: 24 10/100Mbps RJ45
6. Upstream ports: 2 100/1000Mbps RJ45
7. Built-in power supply



ISSK1

1. Swipe the card to open the door
2. Use Tuya app to open the door, can only be used for supporting Android host, as a unit assistant access control
3. Can not be used alone can not be used as a wall card swiping machine



YD-D2

1. Metal shell
2. 2Power on and unlock
3. Four-core cable, 2-core power supply/2-core signal



F2

1. Used in building intercom system computer card issuing
2. Product Type: IC card writer Port type: USB port
3. Voltage current: Voltage 5V current 100mAh
4. Support card: 125K/EM4100/TK4100
5. Working environment: -10°C-60°C
6. Induction distance: 30-70mm
7. Card reading speed: <0.2 seconds
Read interval: <0.5 seconds



1000JHJ8

1. 8 Gigabit Ethernet ports
2. VLAN DV5V1A
3. Metal shell
4. Desktop



12V5A

1. Input: AC110-240V
2. Output: DC12V 5A




YD-B1

1. Metal shell
2. Power off unlock



ID/IC CARD

1. RFID card



1000JHJ16

1. 16 Gigabit Ethernet ports
2. VLAN AC220V
3. Metal shell
4. Desktop,
5. Built-in power supply



15V/2A

1. Power adapter for host power supply
2. Remarks for placing an order: British, American, European, Australian plugs



YD-B2

1. Metal shell
2. Power off unlock



ID/IC CARD

1. RFID card



1000JH24

1. 24 Gigabit Ethernet ports
2. VLAN AC220V
3. Built-in power supply
4. Metal case 1U rack mount




12V5A

1. Input a 220V, output of 12V power supply,
2. Electrical locks can be connected with the access control interface.



YD-M1

1. Magnetic lock



YD-WC

1. Waterproof cover
2. Customize different sizes according to different models

03 PART

Serivce

ISESAR TECHNOLOGY

OEM & ODM & Certificatation & Serivce

Certification



E-mail: atl@atllab.org
 Web: Http://www.atllab.org
 Floor 5,Genesis Zhongye Building No.22,
 Puzai Road, Pingdi Street,Longgang District,
 Shenzhen,Guangdong,China (518000)

EC-Certification of Conformity

EMC Directive 2014/30/EU

Registration No.: ATL20211121081

Applicant: XI'AN ISESAR TECHNOLOGY CO., LTD.

Applicant Address: Room 1402, Building 16, Shuangheyuan, No. 19 Yurun Street, Jianye District, Nanjing City, Jiangsu China.

Manufacturer: XI'AN ISESAR TECHNOLOGY CO., LTD.

Manufacturer Address: Room 1402, Building 16, Shuangheyuan, No. 19 Yurun Street, Jianye District, Nanjing City, Jiangsu China.

Product Designation: Indoor monitor

Brand Name: N/A

Model / Series Models: MK-FJ7F

Requirement	Applied Standards	Document Evidence	Result
EMC Directive	EN 55032:2015/A11:2020; EN 55035:2017/A11:2020.	Test Report ATL20211121081E01	Conform





Signed by Quality Manager
Issue Date: Nov. 25, 2021

Recognized by Shenzhen ATL Testing Technology Co., Ltd., in accordance with the EMC Directive 2014/30/EU. The certificate doesn't imply assessment of the production. The Applicant of the certificate is authorized to use this certificate in connection with EC declaration of conformity to the Directive. The certificate is only applicable to the equipments described above. This certificate shall not be re-produced except in full without the written approval of Shenzhen ATL Testing Technology Co., Ltd.

Note: This certificate is part of the full test report(s) and should be used in conjunction with it.



E-mail: atl@atllab.org
 Web: Http://www.atllab.org
 Floor 5,Genesis Zhongye Building No.22,
 Puzai Road, Pingdi Street,Longgang District,
 Shenzhen,Guangdong,China (518000)

Supplier's Declaration of Conformity

According to FCC part 15

Registration No.: ATL20211121082

Applicant: XI'AN ISESAR TECHNOLOGY CO., LTD.

Applicant Address: Room 1402, Building 16, Shuangheyuan, No. 19 Yurun Street, Jianye District, Nanjing City, Jiangsu China.

Manufacturer: XI'AN ISESAR TECHNOLOGY CO., LTD.

Manufacturer Address: Room 1402, Building 16, Shuangheyuan, No. 19 Yurun Street, Jianye District, Nanjing City, Jiangsu China.

Product Designation: Indoor monitor

Brand Name: N/A

Model / Series Models: MK-FJ7F

Requirement	Applied Standards	Document Evidence	Result
Directive	FCC Part 15 Subpart B.2020	Test Report: ATL20211121082F01	Conform





Signed by Quality Manager
Issue Date: Nov. 25, 2021

Recognized by Shenzhen ATL Testing Technology Co., Ltd., in accordance with the FCC Part 15 Rules. The certificate doesn't imply assessment of the production. The certificate is only applicable to the equipments described above. This certificate shall not be re-produced except in full without the written approval of Shenzhen ATL Testing Technology Co., Ltd.

Note: This certificate is part of the full test report(s) and should be used in conjunction with it.



E-mail: atl@atllab.org
 Web: Http://www.atllab.org
 Floor 5,Genesis Zhongye Building No.22,
 Puzai Road, Pingdi Street,Longgang District,
 Shenzhen,Guangdong,China (518000)

Certification of Conformity

RoHS Directive (EU) 2015/863

The following product has been tested by Shenzhen ATL Testing Technology Co., Ltd., as specified complied with the requirements of RoHS Directive 2011/65/EU and amendment (EU) 2015/863. It is possible to use CE marking to demonstrate the conformity with the RoHS Directive.

Registration No.: ATL20211121083

Applicant: XI'AN ISESAR TECHNOLOGY CO., LTD.

Applicant Address: Room 1402, Building 16, Shuangheyuan, No. 19 Yurun Street, Jianye District, Nanjing City, Jiangsu China.

Manufacturer: XI'AN ISESAR TECHNOLOGY CO., LTD.

Manufacturer Address: Room 1402, Building 16, Shuangheyuan, No. 19 Yurun Street, Jianye District, Nanjing City, Jiangsu China.

Product Designation: Indoor monitor

Brand Name: N/A

Model / Series Models: MK-FJ7F

The referred test report: ATL20211121083R01 shows that the product complies with the essential requirements in the above listed standards. The applicant is authorized to use this declaration in connection with the EC declaration of conformity according to Annex VI of the Directive.






Signed by Quality Manager
Issue Date: Nov. 25, 2021

The statement is based on a single evaluation of one sample of above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

OEM & ODM

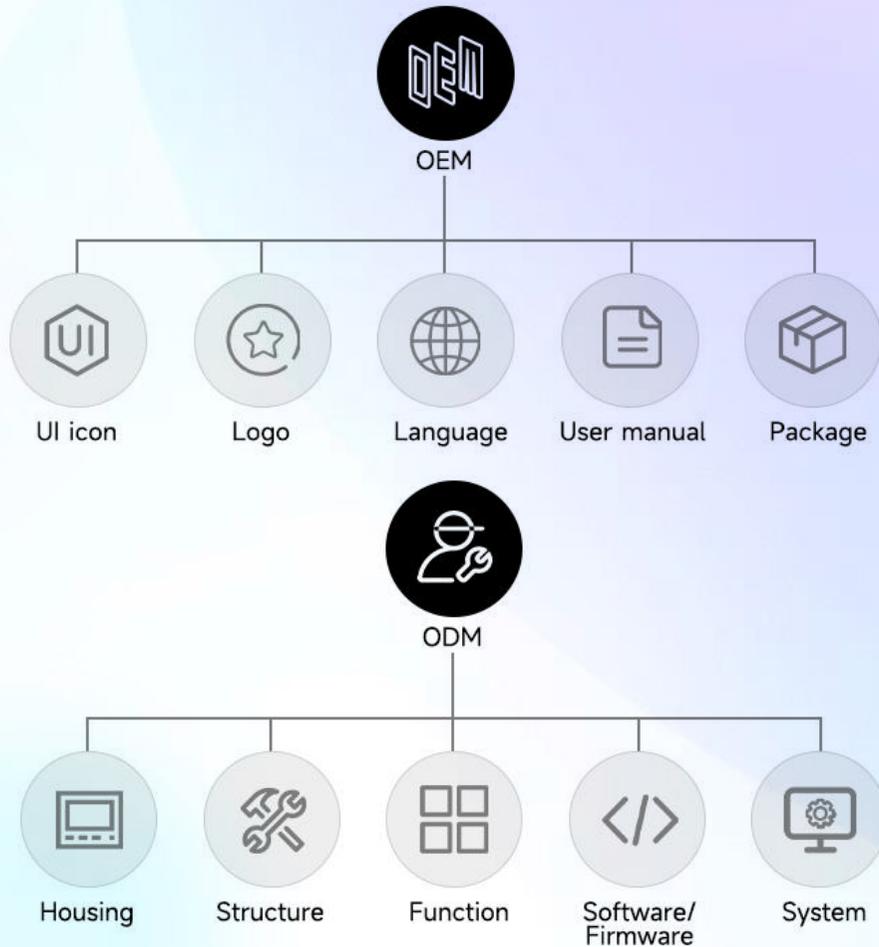

To the customer

We have powerful R&D team, with more than ten years of experience in OEM and ODM. Please tell me all the information about the project. We will discuss it further and give you a good solution of quotation. Thank you very much! I hope we can be good business partners in the future. Have a good day!

Thanks & Regards,
Alex Li

Service




04 PART

Contact us

ISESAR TECHNOLOGY

For solution and quotation of intercom system

Contact us

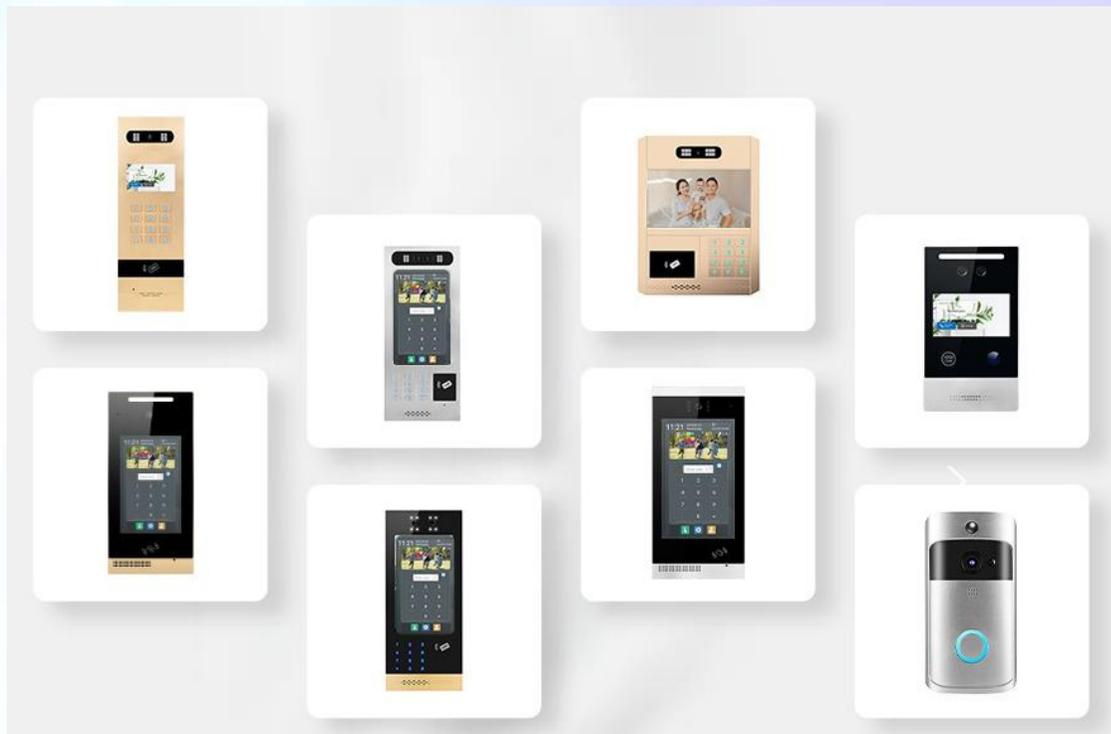

XI`AN ISESAR TECHNOLOGY CO., LTD.

Sales Director

+8613002929936

+8618681800336

alex@isesar.com

www.isesar.com

We make intelligent for home



THANKS

ISESAR China

2023